




주요 특징

- 24 × 10/100/1000Mbps PoE 포트 제공
- 4 × Gigabit SFP/TP Combo 업링크포트 제공
- 기가비트업링크 인터페이스를 통한 다양한 네트워크 구축
- 사용자 암호를 통한 시스템 보호 및 관리
- 포트미러링 기능 제공
- PoE(Power Over Ethernet) 및 PoE+ 지원
- ACL 지원
- CLI 및 Web UI 지원
- TACACS+ 및 RADIUS 지원 (MR-2404P-S 모델)
- QoS 지원 (MR-2404P-S 모델)
- 전기안전인증 완료

제품 사이즈

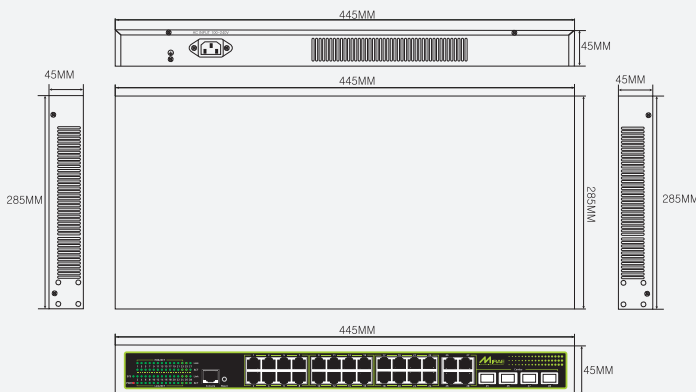

28 Ports Managed PoE Switch MR-2404P

Model.	MR-2404P-S	MR-2404P-L
General Performance Indicator		
Product Name	28 Ports Gigabit Managed PoE Switch	
Interface	24 × 10/100/1000M PoE Ports + 4 × Gigabit SFP/TP Combo Ports + 1 × Console Port	
PoE Parameters	PoE Standard: IEEE802.3at(30W) and IEEE802.3af(15.4W) PoE compatibility: IEEE 802.3af/at adaptive	
Power Supply	Machine input voltage: AC100~240V Total power: 400W	
Physical Dimension	Product size: 445 × 285 × 45mm Product weight: 3.9kg	
Working Environment	Operating Temperature: -20℃ ~ 60℃ Storage Temperature: -40℃ ~ 85℃ Operating Humidity: 10% ~ 95%, non-condensing	

Technical Indicators	
Bandwidth	56Gbps(non-blocking)
Packet Forwarding rate	41.6Mpps
Flash Capacity	16M
Memory Capacity	1024M
MAC	8K

Layer 2 Software Function	
Port Management	Enable/Disable Port, Speed, Duplex, MTU Setting, Flow-control
Port Mirroring	Support both side-way port mirroring
Port Speed Limit	Support port-based input/output bandwidth management
Port Isolation	Support the downlink port isolation
Storm Suppression	Support unknown unicast, multicast, broadcast type storm suppression
Link Aggregation	Support static manual aggregation and LACP dynamic aggregation
VLAN	Access, Trunk, Hybrid
MAC	Support static addition, deletion
Spanning Tree	STP, RSTP, MSTP
Multicast	IGMP-snooping, MLD-Snooping

Extended Function	
ACL	Based on MAC, IP, protocol type, L4 port
QoS	Based on 802.1p(COS) and DSCP classification
LLDP	Support LLDP link discovery protocol
User Setting	Add/delete users
Certification	Support 802.1x port authentication and AAA certification
Network diagnosis	Support ping, telnet, trace
System management	Device reset, configuration save/restore, upgrade management

Management Function	
CLI	Support serial port command line management
SSH	Support SSHv1/2 remote management
Telnet	Support telnet remote management
Web	Support Layer2 settings, Layer2 and Layer3 monitor
SNMP	SNMP V1/V2/V3
TACACS+ / RADIUS certification	Support
Other functions	DHCP Snooping, Dynamic ARP detection, TACACS+ certification, RADIUS certification, DNS certification, port security settings, UDLD protocol

◆ 제품의 외관, 사양 등은 사전 예고 없이 변경될 수 있습니다. ◆ 제품의 색상은 인쇄과정으로 인해 실제와 약간 다를 수 있습니다.