


10 Ports Gigabit L2 Industrial 2.5G PoE Switch

MR-0802P

주요 특징

- 8×10/100/1000Mbps PoE 포트 제공
- 2×2.5G SFP 업링크포트 제공
- 기가비트업링크 인터페이스를 통한 다양한 네트워크 구축
- 사용자 암호를 통한 시스템 보호 및 관리
- 포트미러링 기능 제공
- ERPS(recovery times under 50 ms)
- PoE(Power Over Ethernet) 및 PoE+ 지원
- CLI 및 Web UI 지원
- IP40
- TACACS+ 및 RADIUS 지원 (MR-0802P-S 모델)
- QoS 지원 (MR-0802P-S 모델)

제품 사이즈

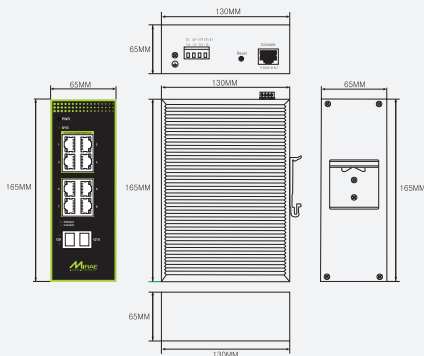

전원공급장치 (별매)



MR-0802P용 전원공급장치

Model.	MR-0802P-S	MR-0802P-L
--------	------------	------------

General Performance Indicator

Product Name	10 Ports Gigabit L2 Industrial 2.5G PoE Switch	
Interface	8×10/100/1000M PoE Ports + 2×2.5G SFP Ports + 1×Console Port	
PoE Parameters	PoE Standard: IEEE802.3at(30W) and IEEE802.3af(15.4W) PoE compatibility: IEEE 802.3af/at adaptive	
Power Supply	Machine input voltage: DC48~55V 4PIN Industrial Terminal	
Physical Dimension	Product size: 165×130×65mm Product weight: 1.1kg Protect grade: IP40	
Working Environment	Operating Temperature: -40℃ ~ 85℃ Storage Temperature: -40℃ ~ 85℃ Humidity: 5% ~ 95%, non-condensing	

Technical Indicators

Bandwidth	26Gbps
Packet Forwarding rate	19.34Mpps
Flash Capacity	16M
MAC	8K

Layer 2 Software Function

Port Management	Enable/Disable Port, Speed, Duplex, MTU Setting, Flow-control
Port Mirroring	Support port mirroring
Port Speed Limit	Support port speed limit
Port Isolation	Support port isolation settings
Storm Suppression	Support unknown unicast, multicast, broadcast type storm suppression
Link Aggregation	Support static manual aggregation and LACP dynamic aggregation
VLAN	Support VLAN and IEEE 802.1Q VLAN
MAC	Support static addition, deletion
Spanning Tree	STP, RSTP, MSTP
Ring Network Protocol	ERPS(recovery times under 50 ms)

Extended Function

ACL	Based on MAC, IP, protocol type, L4 port	
QoS	Based on 802.1p(COS) and DSCP classification	-
LLDP	Support LLDP link discovery protocol	
User Setting	Add/delete users	
Log	User login, operation, status, events	
System management	Device reset, configuration save/restore, upgrade management	

Management Function

CLI	Support serial port command line management	
SSH	Support SSHv1/2 remote management	
Telnet	Support telnet remote management	
Web	Support Layer2 settings	
SNMP	SNMP V1/V2/V3	
PoE	PoE Power Management	
Other functions	TACACS+ certification, RADIUS certification	-

◆ 제품의 외관, 사양 등은 사전 예고없이 변경될 수 있습니다. ◆ 제품의 색상은 인쇄과정으로 인해 실제와 약간 다를 수 있습니다.